



### FEATURES

- Homologated and certified product according to the European Directive EN1493:2010
- Lift suitable for surface or in-ground installation
- Mechanical safeties, air-operated engagement and release
- Parachute valve included
- Overload valve included
- Lowering speed control valve included
- Sensors for top height and the safety height
- Alarming during the final lowering
- Manual emergency lowering
- Play detector can be equipped as an optional accessory



Layout – in-ground installation

Layout – on-ground installation

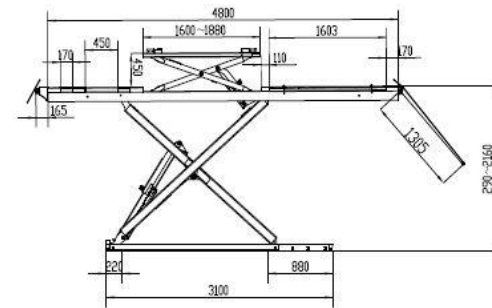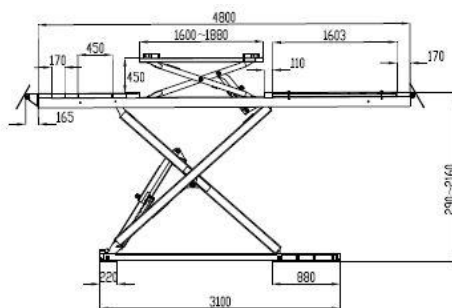

### SPECIFICATION

### STD-8240B4

Lifting capacity 4000kg

Max. lifting height 2160mm

Min. height 290mm

Jack raised height 450mm

Runway length 4800mm

Lifting time 60s

Electric power 400V/230V, 380V/220V

Shipping weight 2280kg

