

SUMMIT 1600

FULLY AUTOMATIC TYRE CHANGER



Summit
Equipment



Optional HP2 Help Arm




Standard accessories

Features:

High-volume automatic tyre changer ideal for use in busy tyre shops. Up to 22" outer clamping. **Optional** HP2 mount help device to assist with the fitting and stripping of low profiles and runflat tyres.

- Automatic tyre changer suitable for car and motorcycle wheels (Adaptors needed)
- Vertical tilting arm
- Pneumatic locking operating arm
- 24" turntable, inside clamping
- Air operated bead breaker
- Oversize body
- Extractable pedal unit
- Optional help arm available to assist with the fitting and stripping of low profiles and runflat tyres

Installation measurements:

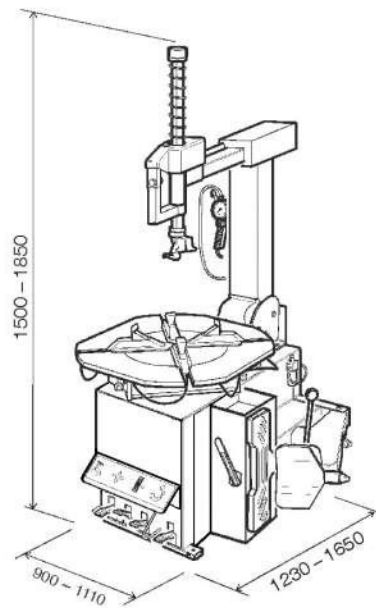

Technical Specifications

Rim Clamping	10" - 24"
Max. wheel diameter	39" (1000mm)
Max. wheel width	340mm (13")
Bead-breaker cylinder force at 10 bar	2500kg
Operating pressure	10 bar (140 psi)
Max. spindle torque	1200 Nm
Motor power	0.75kw
Power supply	220 volt
Max. inflating pressure	3.5 Bar (50 Psi)
Gross weight	233kg
Packaging dimensions	70 x 760 x 940 mm

Supplied and serviced by:

Summit
Equipment

GTS Garage
Equipment

Tel: 011 908 4169

email: info@gtsequipment.co.za