


SUMMIT STANDARD 3D

STANDARD 3D WHEEL ALIGNER




Summit
Equipment




Model selection

Parameter	Min.	Pref.	Max.	Cross	Min.	Pref.	Max.
Center	-1°15'	0°25'	-1°15'	0°25'			
Camber	-1°15'	0°25'	-1°15'	0°25'			
SAI	0°00'	0°00'	0°00'	0°00'			
Individual Toe	0°00'	0°00'	0°00'	0°00'			
Total Toe	0°00'	0°00'	0°00'	0°00'			
Rear	Min.	Pref.	Max.	Cross	Min.	Pref.	Max.
Camber	-1°15'	0°25'	-1°15'	0°25'			
Individual Toe	0°00'	0°00'	0°00'	0°00'			
Total Toe	0°00'	0°00'	0°00'	0°00'			
Thrust Angle	0°14'	0°12'	0°22'				


Specification window

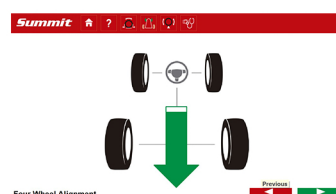

Runout compensation



Castor swing



Live adjustment screen

Features:

Real 3D camera measuring technology

1.3 megapixel cameras

24 inch rim clamps

No calibration needed

Dell / HP Computer with Windows 10 / 11, 64-Bit

Solid-state hard drive

Easy-to-use operation

English voice navigation for operation


Multi-language alignment software interface

More than 20 000 car model specification worldwide

Extra camera for lift parking aid system

Two wheel quick alignment function

Installation measurements:

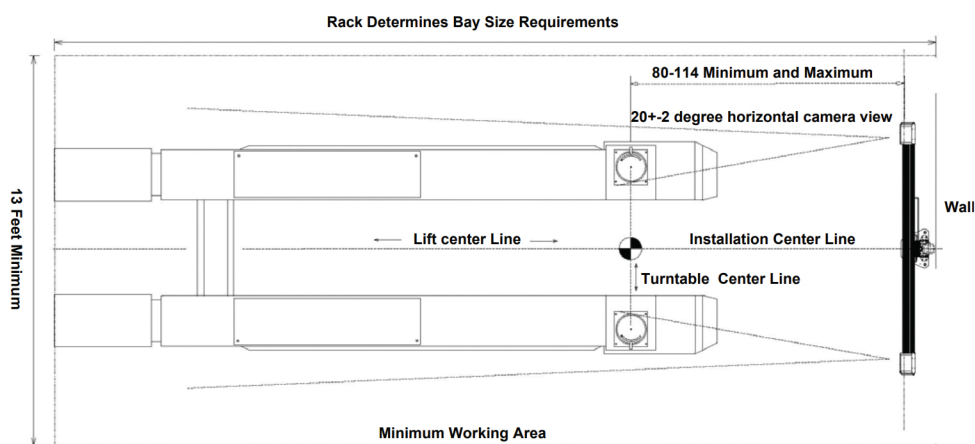

Standard Equipment:



Camera beam



Computer



Targets with 24" clamps



Turntables



Steering lock



Brake lock

Supplied and Serviced by:

Summit
Equipment

GTS Garage
Equipment

Tel: 011 908 4169

Website: www.gtsequipment.co.za